


■ SPECIFICATIONS

Enclosure Type	Vented (bass reflex) type
Speakers	Low Frequency : 20 cm woofer High Frequency : CD horn plus compression driver
Power Handling Capacity	Continuous pink noise : 80 W RMS of band limited pink noise (40 Hz ~ 20,000 Hz, 24 hours) Continuous program : 240 W Instantaneous peak : 800 W
Nominal Impedance	8 Ω
Sensitivity	93 dB (1 m, 1 W, Band-limited pink noise, 230 Hz ~ 2,500 Hz)
Frequency Response	70 Hz ~ 20,000 Hz
Box tuning frequency	70 Hz
Crossover frequency	3,000 Hz
Crossover Slope	12 dB/Oct. (Woofer) 18 dB/Oct. (Tweeter)
Input Terminals	Two 1/4" phone jacks and screw type, both for full-range
Enclosure materials	Low-foam polypropylene
Finish	Gray
Dimensions (WXHXD)	452(17.79") × 282(11.10") × 232(9.13") mm
Weight	7.5 kg (16.53 lb.)
Applicable Brackets	Wall mount : HY-501B, HY-601B, YS-500, YS-60 (option) Ceiling mount : HY-30 (option)

■ APPEARANCE

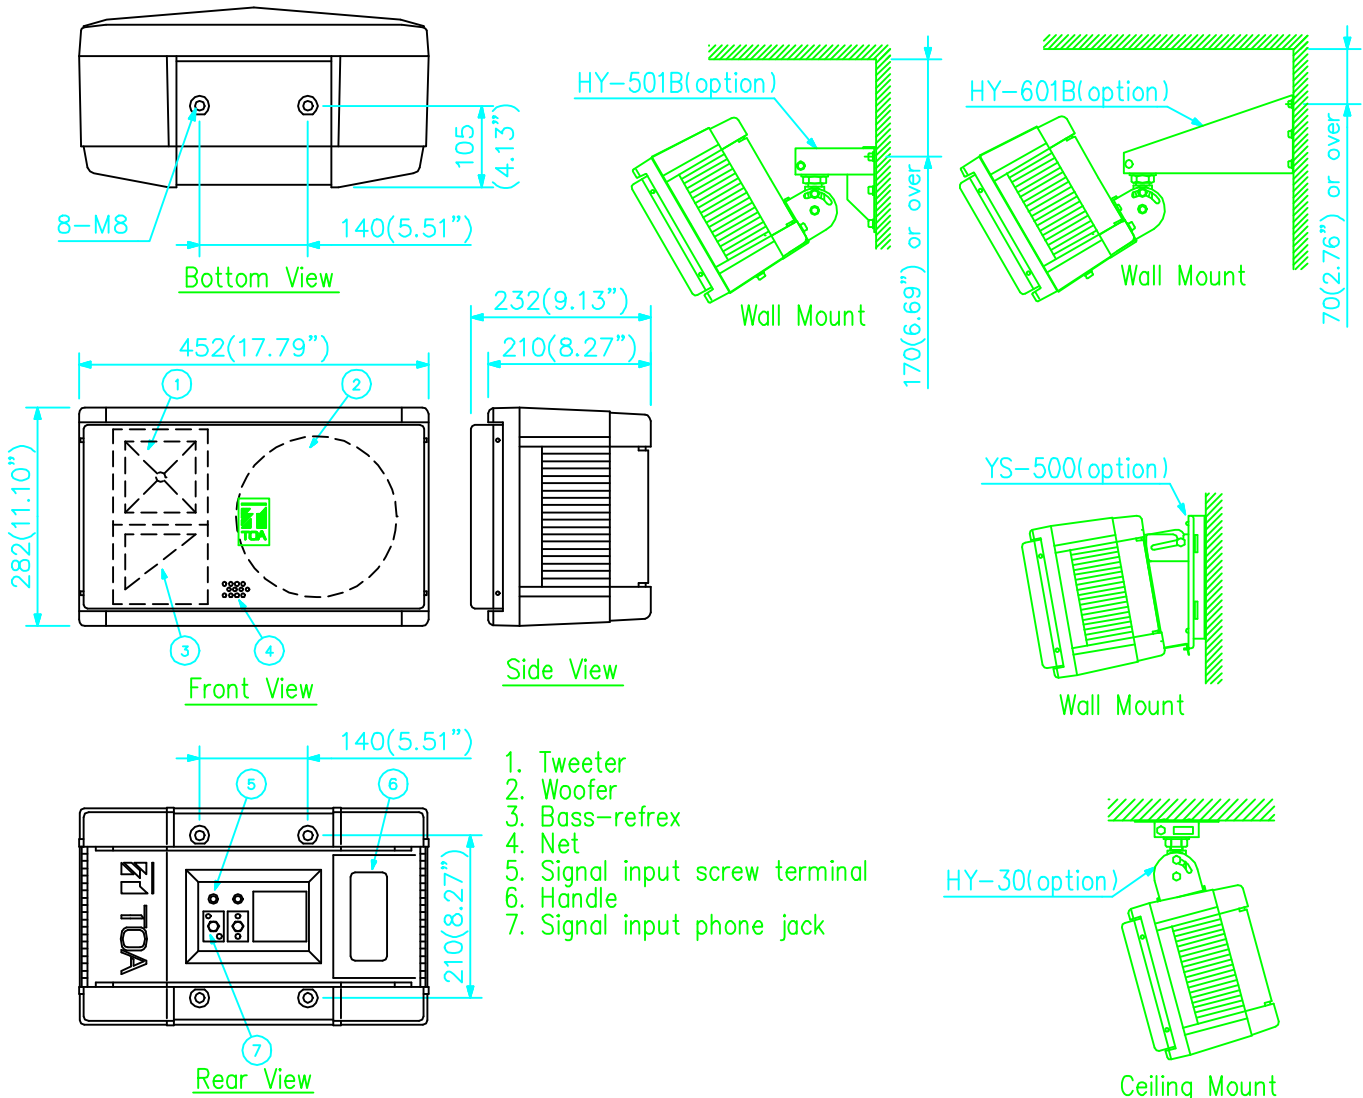

1. Tweeter
2. Woofer
3. Bass-reflex
4. Net
5. Signal input screw terminal
6. Handle
7. Signal input phone jack

UNIT:mm SCALE: 1/10