


DESCRIPTION

The LU-100 is a subscriber line interface device that can connect a single control station and fifteen interfaces for room stations. With this device, a talk back or simultaneous handset conversation is enabled. Up to eight LU-100 units can be installed in a CK-100 card case.

SPECIFICATIONS

Speech Method	Automatic talk-back thru electronic voice switch Talk back conversation (push-to-talk key) Simultaneous conversation (handset station)
Number of Cables	1 (control station) 15 (room station)
Wiring	Twin twisted-paired cable (control station) single shielded twisted-paired cable (room station)
Power Requirements	5 V DC, 10 mA max. 15 V DC, 10 mA max. 24 V DC, 1 A max.
Termination	Internal data bus : Ribbon cable connector Line connection : Screwless terminal block
Dimensions(WXHXD)	265(10.43")X154(6.06")X35(1.38") mm
Weight	670 g (1.48 lb.)

APPEARANCE

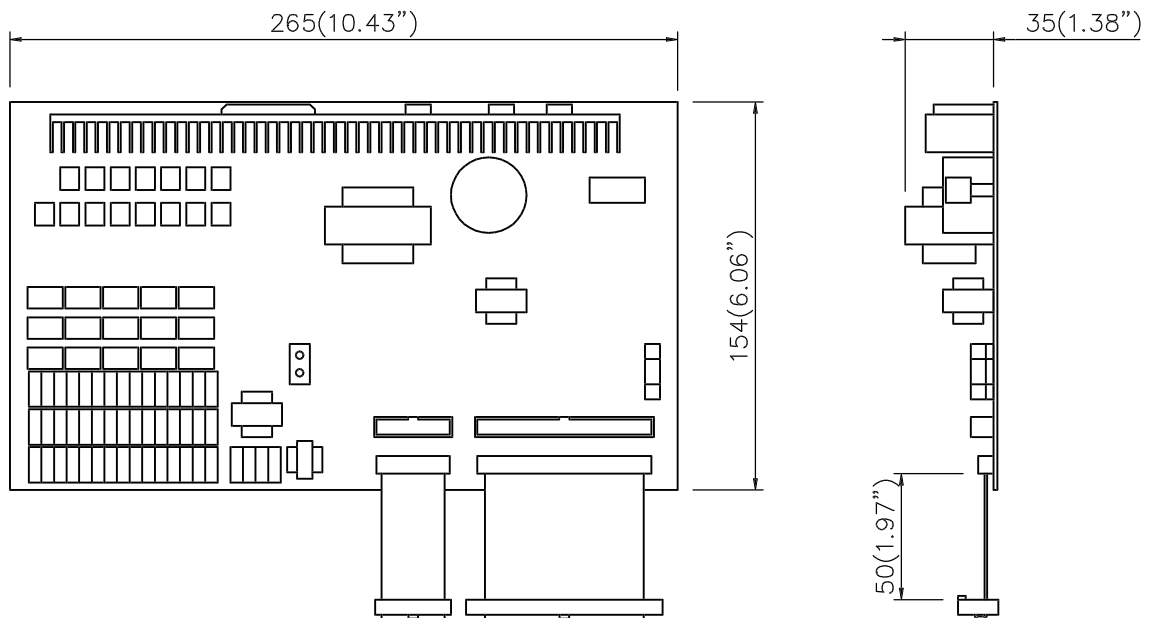

UNIT:mm SCALE:1/3