


DESCRIPTION

The TOA P-60F is a multichannel power amplifier featuring high power handling capability and durability. It comes with four simultaneously-driven amplifiers, each of which provides 60 W of output (8 Ω load) or 80 W (4 Ω load). It is ideal for store sound systems or other permanent installation applications.

SPECIFICATIONS

|                            |  |
|----------------------------|--|
| Power Requirement          | 240 VAC, 50/60 Hz  |
| Power Consumption          | 670 W (4 channels, 4 Ω, rated output)  |
| Power Output               | 4 channels : 60 W × 4 (8 Ω, 1 kHz)<br>80 W × 4 (4 Ω, 1 kHz)<br>2 channels : 160 W × 2 (8 Ω, 1 kHz)   |
| Frequency Response         | +0 dB, -2.0 dB (8 Ω, 20 - 20,000 Hz)   |
| T.H.D.                     | 4 channels : Less than 0.01 % (8 Ω, 4 Ω, 1 kHz)<br>Less than 0.3 % (8 Ω, 4 Ω, 20 - 20,000 Hz)<br>2 channels : Less than 0.01 % (8 Ω, 1 kHz)<br>Less than 0.3 % (8 Ω, 20 - 20,000 Hz) |
| Intermodulation Distortion | 4 channels : Less than 0.03 % (60 Hz : 7 kHz = 4 : 1, 8 Ω)<br>2 channels : Less than 0.05 % (60 Hz : 7 kHz = 4 : 1, 8 Ω)   |
| Input Impedance            | 10 kΩ (balanced)   |
| Input Sensitivity          | +4 dB (1.23 V) ±0.5 dB (8 Ω, at maximum input level)   |
| Damping Factor             | More than 50 (1 kHz, 8 Ω)  |
| S/N Ratio                  | More than 110 dB (20 - 20,000 Hz)<br>More than 115 dB (IHF-A weighted)   |
| Finish                     | Front panel : Alumite, black   |
| Dimensions                 | 482.6 (W) × 101.4 (H) × 403.8 (D) mm   |
| Weight                     | 10 kg  |
| Accessories                | Rack mounting screw.....4  |

APPEARANCE

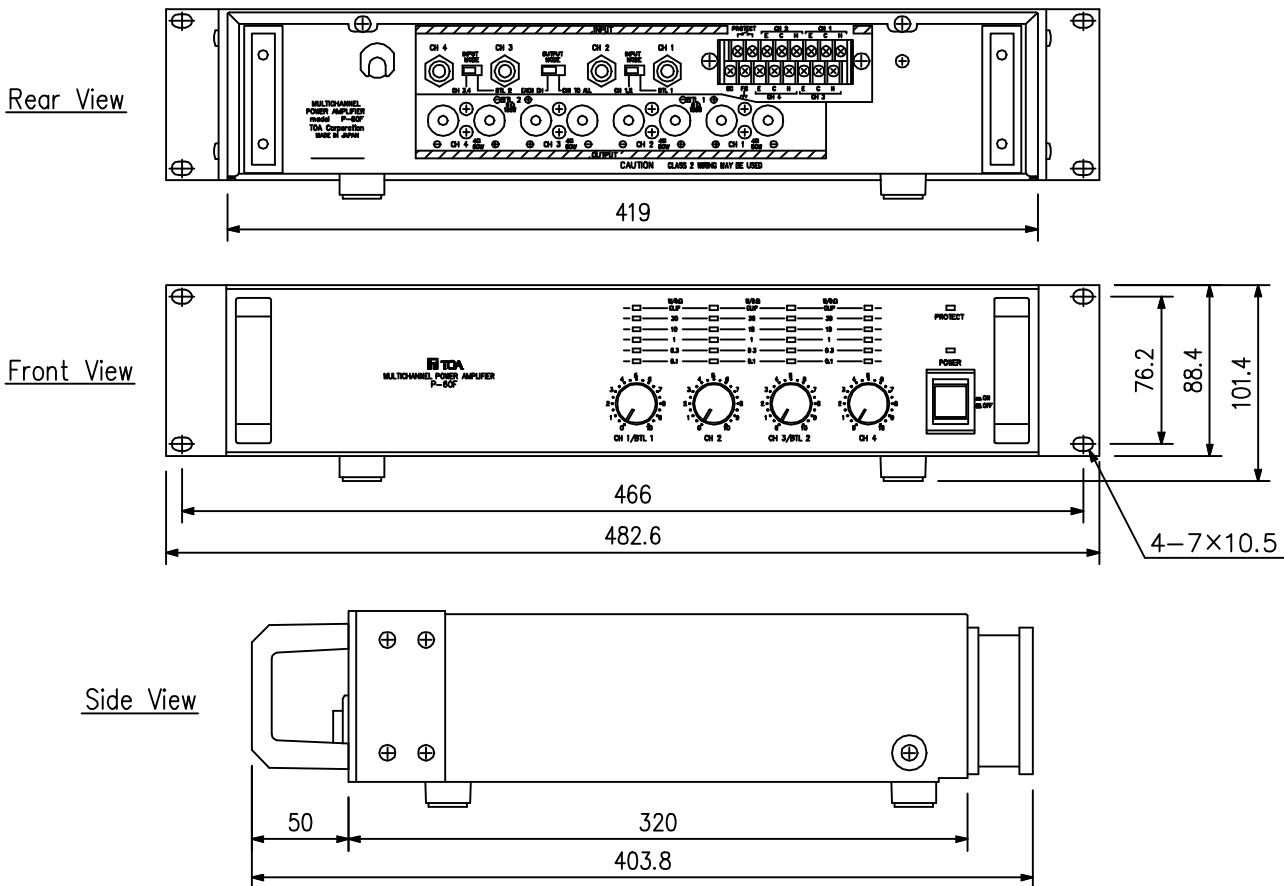

UNIT: mm SCALE: 1/4